

Datasheet				
Mod.	Dwg n.	Date	Check	Rev.
6D-34-AB	941163	19/10/2017	AC	0

## FOAM FIRE EXTINGUISHER 6L STORED PRESSURE

Certified PED 2014/68/EU and EN 3.7

Fire rating 34A – 183B



Organic solid materials  
wood, rubber, textiles, etc.




Flammable liquids,  
gasoline, oil, etc.

### Technical specification

Cylinder diameter	:	162 mm
Material	:	Steel cylinder internal coated, aluminium valve
Operating pressure	:	15 bar at 20°C
Test pressure	:	30 bar
Burst pressure	:	> 55 bar
Temperature range	:	0°C + 60°C
Extinguishing agent	:	Water + foam BSX233 + ASX
Propellant	:	N <sub>2</sub>
Nominal charge	:	6 l
Jet length	:	~ 6 m

### Dimensions

Height:	526 mm
Diameter:	162 mm
Weight:	11kg

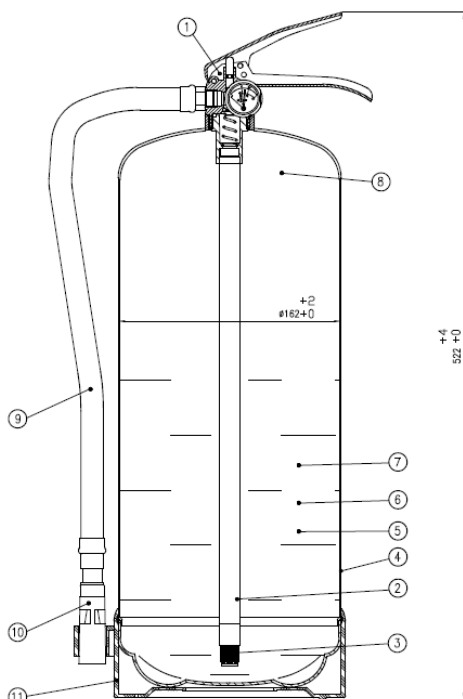

### SPARE PARTS LIST

Pos.	Description	Code
1	Complete valve	7204007
2	Dip tube	2230185
3	Filter	2410001
4	Cylinder	0010557
5	Water	2023000
6	Foam BSX 233	2020042
7	Additive ASX	2020041
8	Nitrogen	2020032
9	Hose	2330126
10	Nozzle	2290016
11	Base	2017450

The use of non original spare parts may cause malfunctions loss

### Maintenance and Guarantee

Maintenance must be made periodically by, trained and certified staff, according to the local regulations of the country where it is located. The extinguisher is guaranteed for 24 months from the date of the supply. The guarantee includes, repairing or replacement for production defects, unit must be sent back to the factory free of charge, only when authorized written agreement with our sales office has been reached. The guarantee expires in case of tampering and bad maintenance made by not-authorized staff. It must be recharged only by staff authorized and certified by. use only original extinguisher agent and spare parts. Technical data are subject to modification for improvements without prior notice

Total or partial reproduction, of this document is prohibited