

Data sheet				
Mod.	Dwg n.	Date	Check	Rev.
P2GD	940624	19/10/2016	AC	0

FIRE EXTINGUISHER 2KG POWDER

stored pressure type
 Certified PED 2014/68/EU and EN 3.7
 Fire rating 13A – 89B – C




Organic solid materials
wood, rubber, textiles, etc.



Flammable liquids,
gasoline, oil, etc.



Flammable gases,
methane, propane.

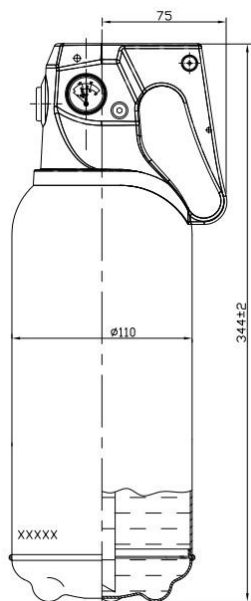

Technical specification


Cylinder diameter _____ : 110 mm
 Material _____ : Steel cylinder, brass valve
 Operating pressure _____ : 15 bar at 20°C
 Test pressure _____ : 30 bar
 Burst pressure _____ : > 55 bar
 Temperature range _____ : -30°C + 60°C
 Extinguishing agent _____ : ABC powder
 Propellant _____ : N₂ + He
 Nominal charge _____ : 2 kg
 Jet length _____ : ~ 5 m

Dimensions

Height: 344 mm
 Diameter: 110 mm
 Weight: 4 kg

SPARE PARTS LIST

Pos.	Description	Code
1	Valve	2340107
1A	Spring	2150002
1B	O-Ring 26,64x2,62 mm	2090200
1C	Seal	2250004
1D	Piston group	2380022
1E	Adapter	2160500
1F	Complete cap	2710000
1G	Check valve	2170001
1H	Fixed pin 2x16mm	2100001
1I	Gauge	2120001
1L	Plug check valve	2220200
2	Nozzle	2211509
3	Dip tube	2230142
4	ABC powder	2020003
5	Cylinder	0010119
6	Label	-
7	Bracket	2200084

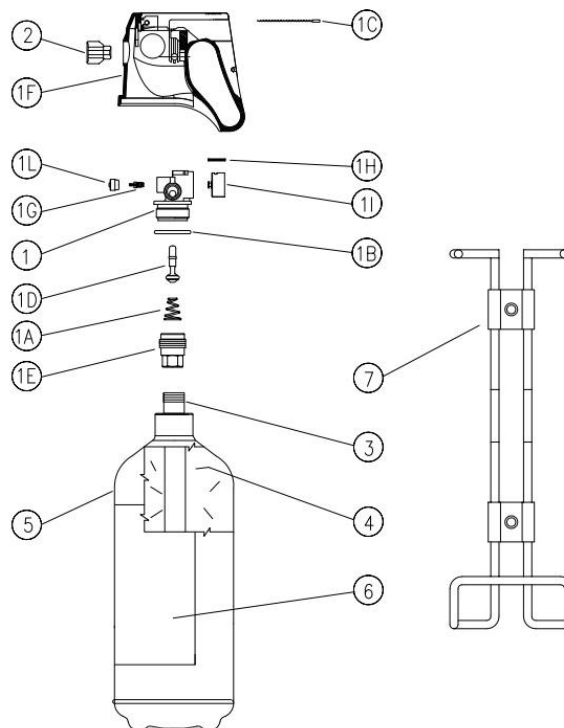

The use of non original spare parts may cause malfunctions loss

Maintenance and Guarantee

Maintenance must be made periodically by, trained and certified staff, according to the local regulations of the country where it is located. The extinguisher is guaranteed for 24 months from the date of the supply. The guarantee includes, repairing or replacement for production defects, unit must be sent back to the factory free of charge, only when authorized written agreement with our sales office has been reached. The guarantee expires in case of tampering and bad maintenance made by not-authorized staff. It must be recharged only by staff authorized and certified by use only original extinguisher agent and spare parts.

Technical data are subject to modification for improvements without prior notice